



The Direction of Fluid Dynamics for Liquid Propulsion at NASA Marshall Space Flight Center

Presented by Lisa W. Griffin
Chief, Fluid Dynamics Branch – ER42
NASA Marshall Space Flight Center
Lisa.W.Griffin@nasa.gov

Advances in Rocket Engine Modeling and Simulation, and its Future
Tokyo, Japan
September 26 – 27, 2012





NASA MARSHALL SPACE FLIGHT CENTER



Marshall Space Flight Center (MSFC) is one of ten NASA field centers. MSFC supports the Agency goals of lifting from Earth, living and working in space, and understanding our world and beyond by providing propulsion, space transportation, space systems, and scientific research.



MSFC is the NASA-designated center for the development of space launch systems. The center is particularly well-known for propulsion system development

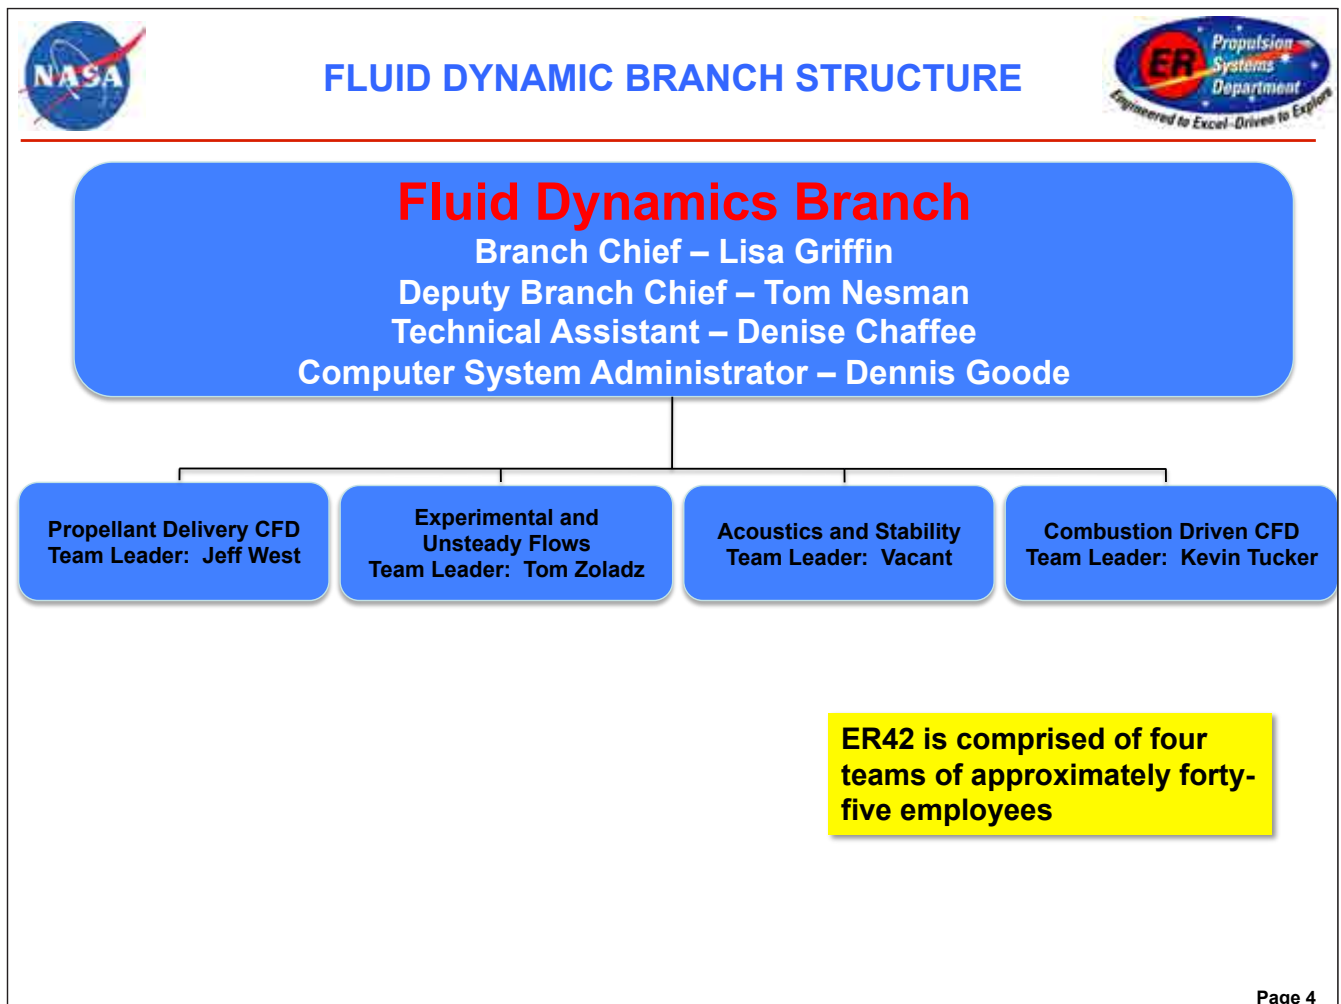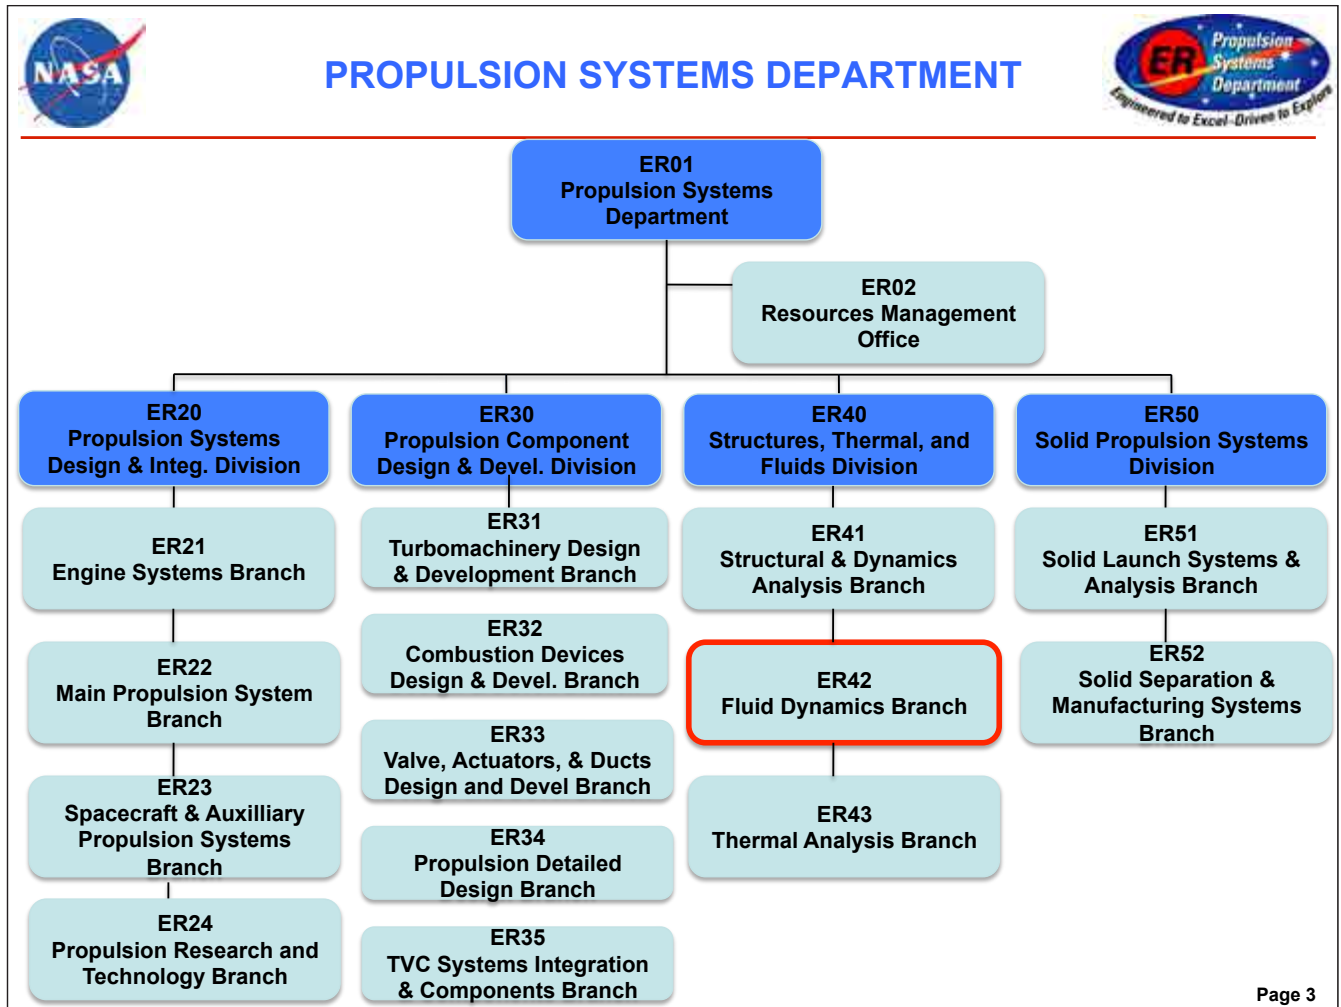



FLUID DYNAMICS BRANCH APPLICATIONS



The Fluid Dynamics Branch (ER42) is responsible for all aspects of the discipline of fluid dynamics applied to propulsion or propulsion-induced loads and environments. This work begins with design trades and parametric studies, and continues through development, risk assessment, anomaly investigation and resolution, and failure investigations. Because of the skills in the branch, ER42 also works non-propulsion items such as for telescopes and payload racks on an as needed basis.

Main Propulsion System	Turbopumps	Liquid Combustion Devices	Solid Rocket Motors
<ul style="list-style-type: none"> Tank Dynamics Cryofluid Management Feedline Flow Dynamics Valve Flow and Dynamics 	<ul style="list-style-type: none"> Pump Dynamics Turbine Dynamics 	<ul style="list-style-type: none"> Injection Dynamics Chamber Acoustics Combustion Stability Nozzle Dynamics 	<ul style="list-style-type: none"> Motor Dynamics Nozzle Dynamics Combustion Stability
Coupled Systems	Launch, Separation, and Plume-Induced Environments and Debris	ER42 is a Discipline-Centric branch, not analysis-centric or test-centric. Integration of all discipline methods into one branch enables efficient and accurate support to the projects.	
<ul style="list-style-type: none"> Feed System Dynamics Coupled Pump/MPS Dynamics, e.g., Pogo Thrust Oscillations and its Impact on the Vehicle Tank Slosh and its Impact on Vehicle Stability and GN&C 	<ul style="list-style-type: none"> Liftoff Acoustics Separation Acoustics Overpressure Inflight Plume Generated Noise Noise Mitigation Hydrogen Entrapment Liftoff Debris Transport 		


Page 5



FLUID DYNAMICS ANALYSIS




Scaling Methods

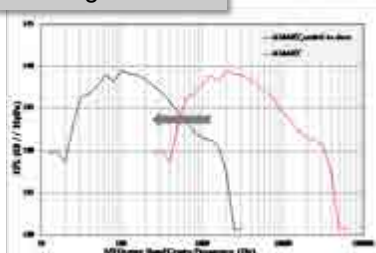

ER42 conducts all levels of fluid dynamics analysis from scaling methods through 3D Unsteady CFD

Lump Parameter Modeling

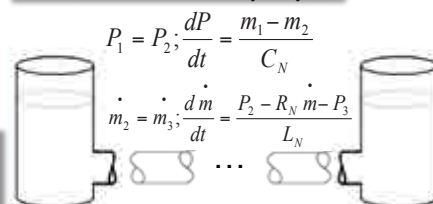


$$x(\omega) = \frac{\bar{X} \sin(\omega(\bar{\tau}_{r,p} - \bar{\tau}_{r,f}))}{\sin(\omega\bar{\tau}_{r,f}) + \theta_g \omega \cos(\omega\bar{\tau}_{r,f})}$$



$$y(\omega) = \omega$$

$$z(\omega) = \frac{\bar{F} \sin(\omega(\bar{\tau}_{r,f} - \bar{\tau}_{r,p}))}{\sin(\omega\bar{\tau}_{r,p}) + \theta_g \omega \cos(\omega\bar{\tau}_{r,p})}$$

Gain / Phase Plots




Finite Element Modeling

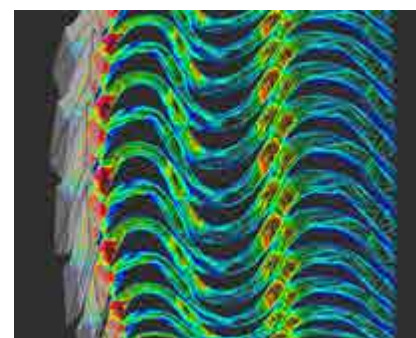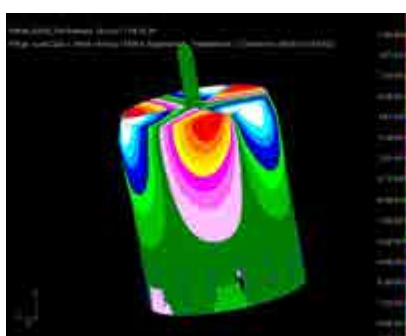


Computational Fluid Dynamics


System Stability Modeling

Page 6



FLUID DYNAMICS TESTING







Waterflow Testing in Pump Facility

ER42 conducts and supports testing for hardware and technology development and verification, and analysis validation


- Primary responsibility for cold flow and scale model acoustics tests
- Secondary responsibility for hot system and component testing

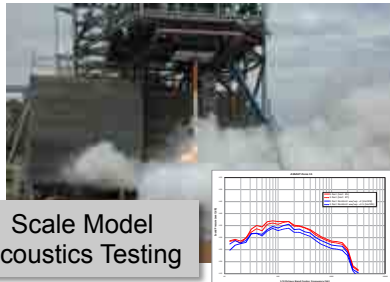


Scale Model Acoustics Testing

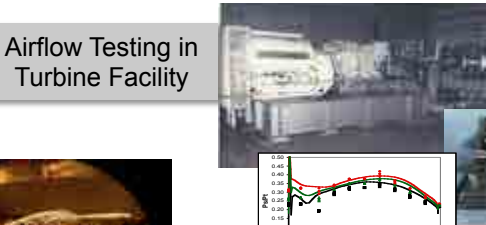


Airflow Testing in Turbine Facility

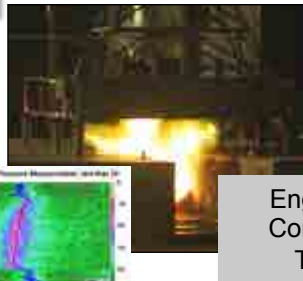

Engine and Component Testing

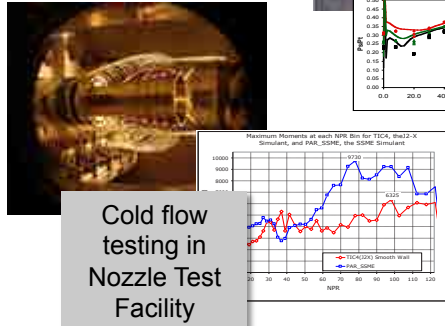


Cold flow testing in Nozzle Test Facility




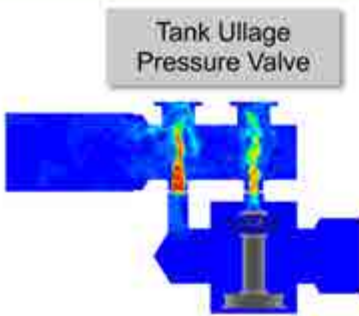
Solid Rocket Testing

Page 7



MAIN PROPULSION SYSTEM






Tank Ullage Pressure Valve


The Main Propulsion System (MPS) is defined as the propellant delivery system from Tank to Engine Interface.

- Tank with all of its internal components
- Valves
- Feedlines with all of its internal components


ER42's primary analysis tool for MPS is CFD



LOX Tank

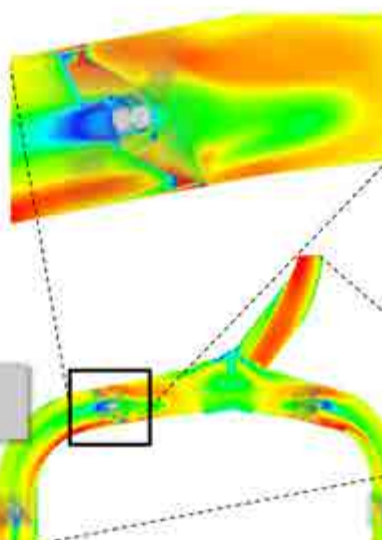

Articulating Feedline



Engine Interface

Page 8




LIQUID PROPELLANT TANKS - SLOSH



ER42 performs high fidelity CFD analysis of complex geometry and/or complex accelerated propellant tank sloshing to determine slosh modes and their respective frequencies, amplitudes, and damping characteristics



Earth to Orbit Simulation

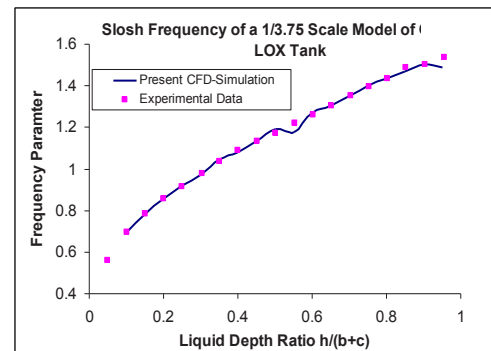

Improvement to Classic Mass-Spring Model

Next challenges with future simulations include implementation of massively parallel gas-liquid interface tracking methods and efficient hybrid implicit/explicit methods to address disparate time-stepping requirements


Page 9



LIQUID PROPELLANT TANKS – PRESSURIZATION AND DRAIN



Assessment of Anti-Vortex Baffle Design

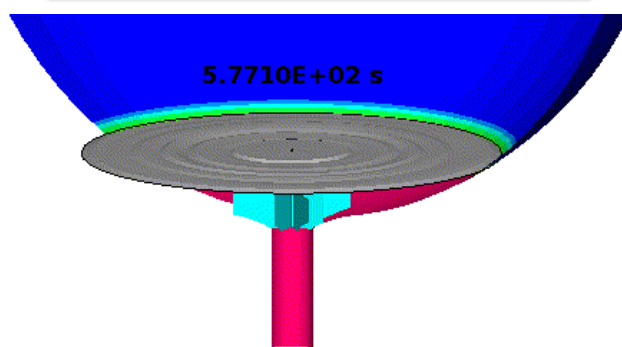

▪ Tank Pressurization


- Flow through diffuser
- Interaction of ullage gas with propellant surface (mass transfer, multiphase heat transfer, surface evaporation, chemical species)

▪ Tank Drain

- Analysis of vortical flow in pipe
- Assessment of anti-vortex baffle efficiency

▪ Near Term Work

- Validation of robust method for simulating mass transfer across the gas-liquid interface

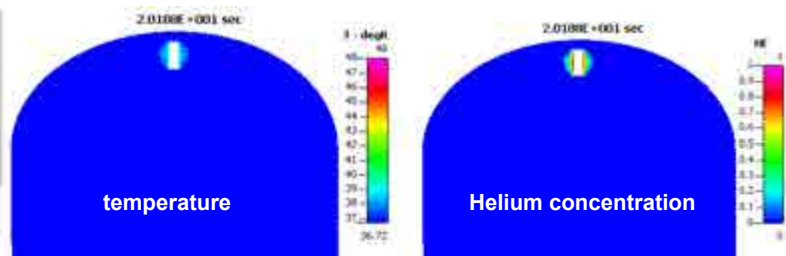

LH2 Tank Pre-press Analysis


Page 10



VALVES



Partially Open Liquid Fuel and Oxidizer Ball Valves

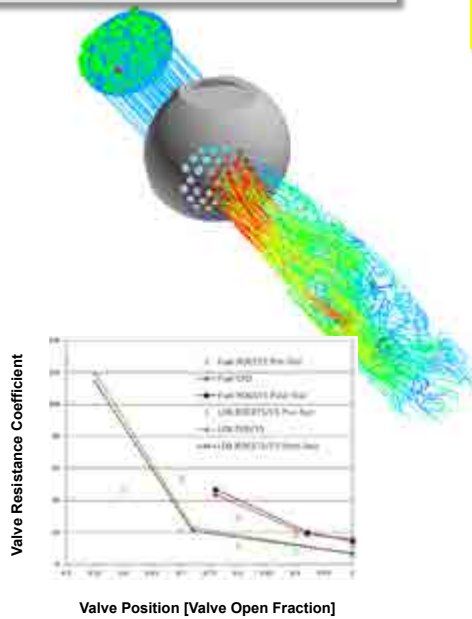


Future work aimed at implementation of valve component force and friction models


ER42 conducts high fidelity CFD simulations of valves to predict fluid flow patterns, mean pressure drops, and unsteady fluid environments

Transient 3D Simulation of Poppet Valve


Still Images of Mach Number as Valve Closes

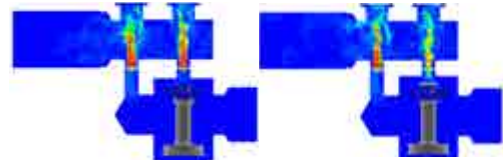


Still Images of Mach Number as Valve Re-opens

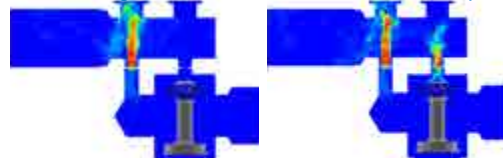

Time-accurate Forces on Poppet During Valve Stroke




Time-accurate Pressure Oscillations During Valve Stroke



Page 11



POPPET VALVE ANIMATION

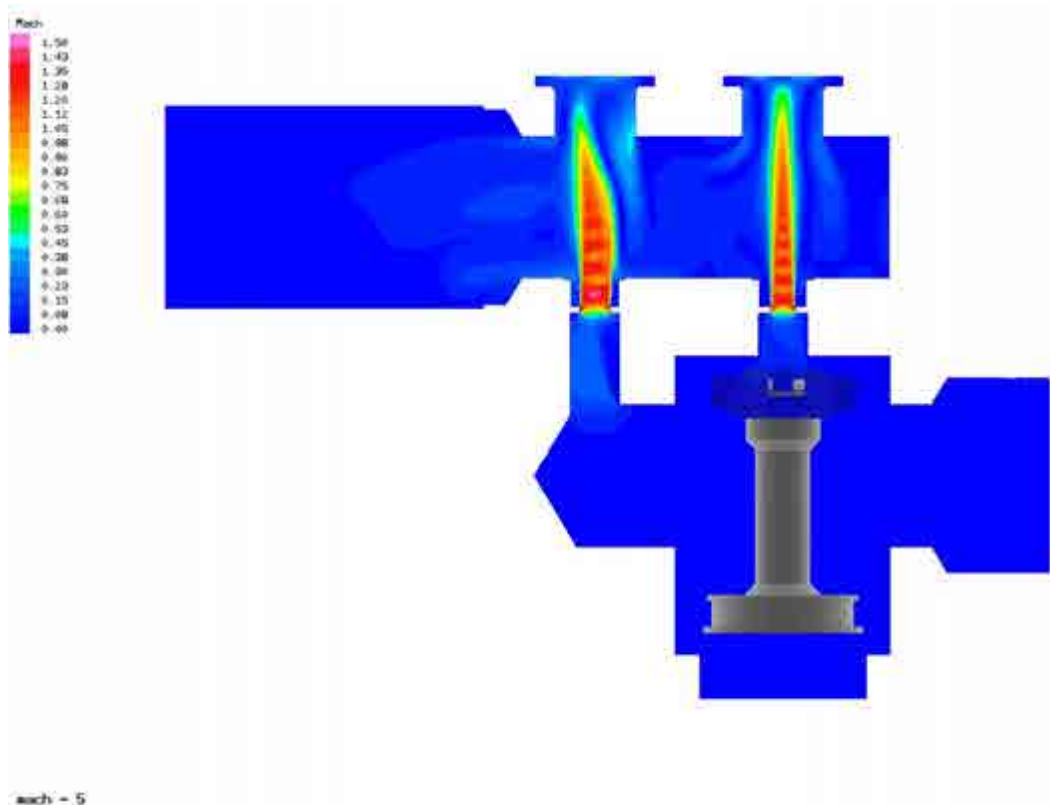

0.0000025

Page 12




FEEDLINES




Waterflow Test Article


ER42 performs high fidelity CFD simulations of liquid propellant feedlines to predict pressure drops through bends, articulating joints, and splits, flow uniformity dues to bends and wakes, and unsteady pressure environments

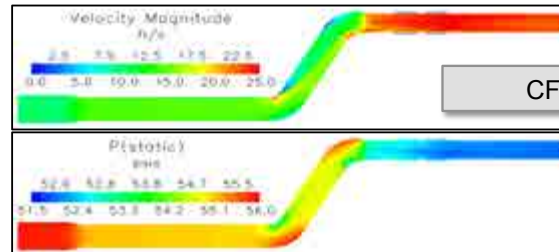

CFD Predictions

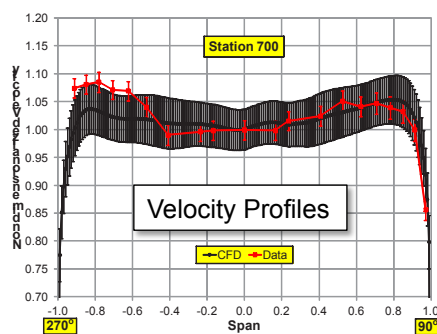

Velocity Profiles

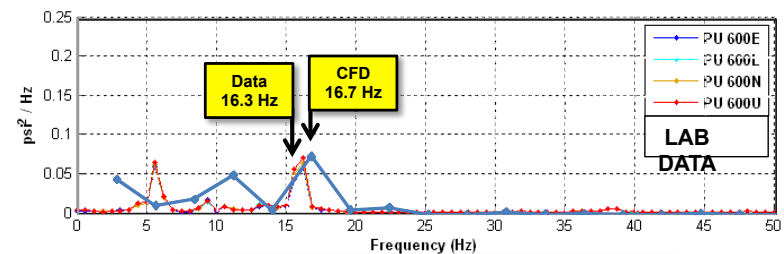

Harmonic Analysis of Pressure Tap Data



TURBOPUMPS



ER42 supports the design, development, and certification of high-speed turbomachinery


- Quick turnaround CFD design parametrics
- Time-accurate rotor-stator CFD analysis
- Highly instrumented pump waterflow test
- Component and engine test support



Turbine Airflow Rotating Assembly




Pump Waterflow Test Article

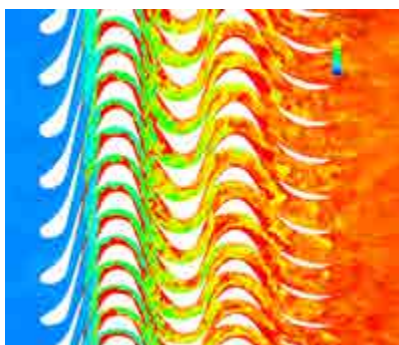

Turbine Unsteady CFD Analysis



Hotfire Engine Test

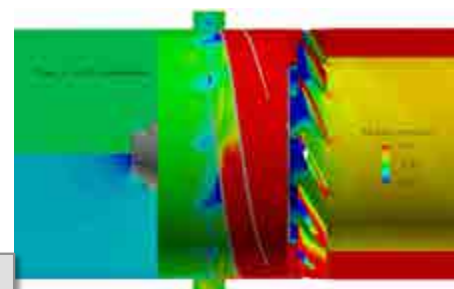

Pump Unsteady CFD Analysis




TURBOPUMPS – TURBINE ANALYSIS




Spatially Resolved First Rotor

~550 Million Grid Cells

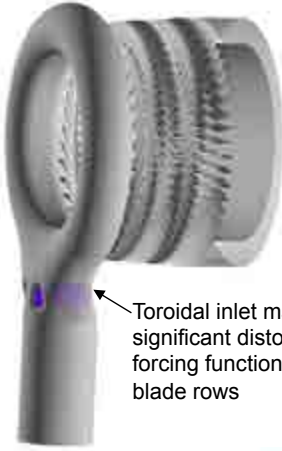

Toroidal inlet manifold causes significant distortions of unsteady forcing functions in downstream blade rows


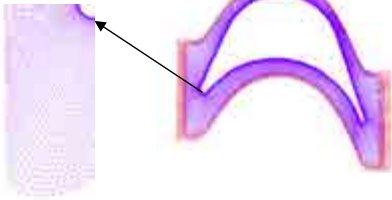


Fuel Turbine Computational Domain


Unsteady Loads Development

- All flow features which significantly modify fluid forcing functions of interest must be modeled
- Must show spatial and temporal resolution of unsteady forcing functions.
- Full 360 degrees models are necessary for most rocket turbines due to large regions of separated flow. Periodic models corrupt the unsteady forcing functions and are not sufficient.

Instantaneous Entropy Contours




Vortex Shedding



Highly Separated Flow

Expansion Wave



Bow Shock

Instantaneous Pressure Contours


Page 15



TURBOPUMPS – TURBINE ANALYSIS




Instantaneous Unsteady Pressure Fuel Turbine

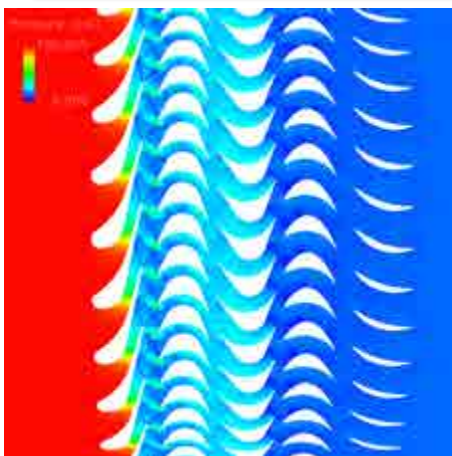


Unsteady Loads Delivery

- Unsteady pressure history saved at all points of all blade surfaces Must show spatial and temporal resolution of unsteady forcing functions
- Unsteady pressure histories from blade surfaces are interpolated onto stress grids for structural analysis. All blades must be used if rotor-rotor or stator-stator effects are to be captured
- Unsteady pressures may be delivered in temporal or frequency domains

CFD Solution



Stress Grid

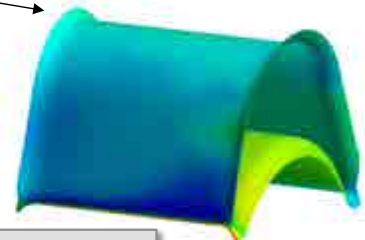

Pressure Interpolation onto Stress Grid

Page 16





TURBINE AIRFLOW TESTING



Testing of Highly Instrumented Turbine Models in Scaled Air Conditions

- Steady and unsteady pressure loadings
- Interstage cavity pressures
- Performance mapping over a wide range
- CFD validation

Fourier Transforms of First Stage Blade Suction Side at 13% Axial Chord and 50% Span Location

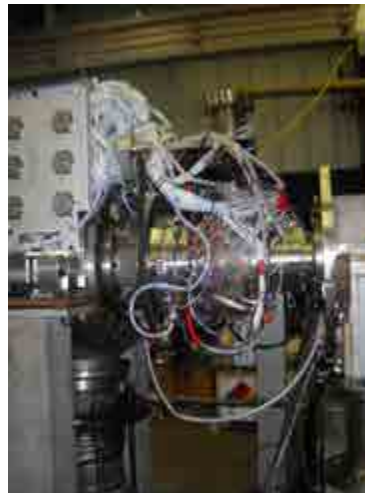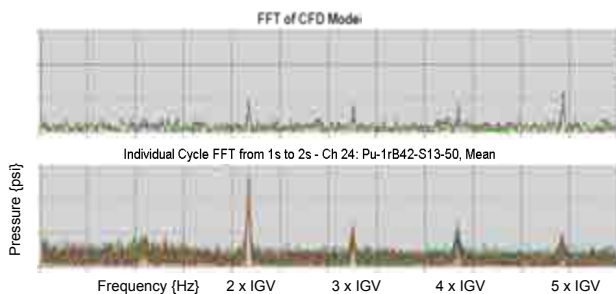

Highly Instrumented Turbine Test Article




On Shaft Data Acquisition System

Page 17



PUMP WATERFLOW TESTING

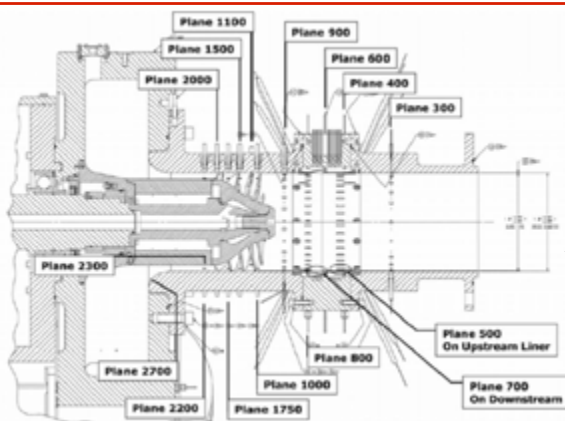

2-blade inducer with on-rotor dynamic force measurement system






Low pressure pump with upstream main propulsion system element simulation

Comprehensive steady and unsteady pump performance is evaluated at scaled engine operating conditions. Dense instrumentation suites, velocimetry, and flow visualization are utilized in mapping pump characteristics.

Page 18





PUMP WATERFLOW TESTING

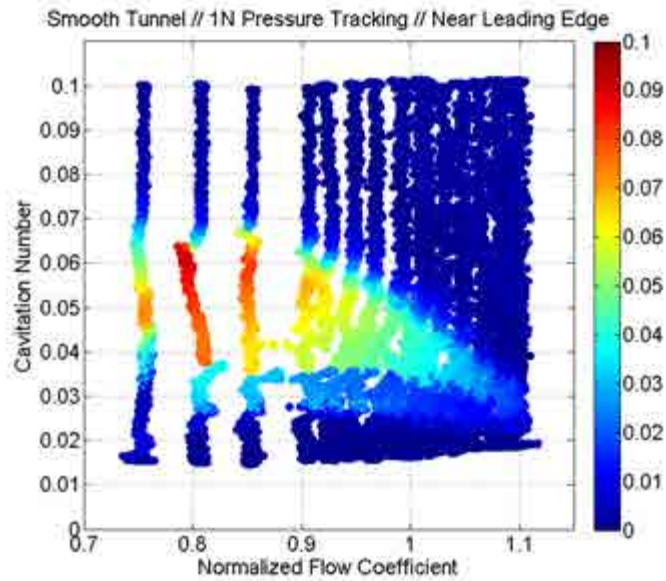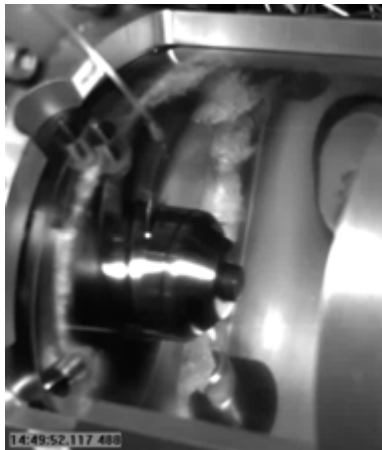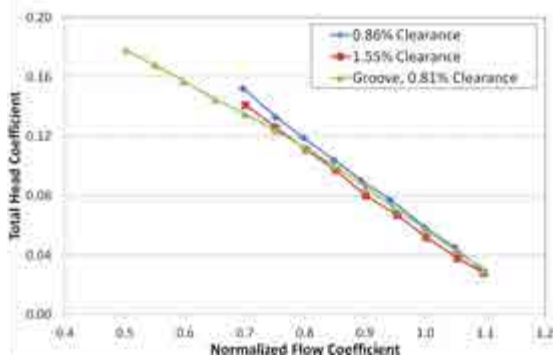

Evaluation of steady pump performance parameters, cavitation oscillation trends, and high-speed flow visualization provides early risk reduction for a turbopump during its preliminary design cycle. Sometimes, comprehensive waterflow is used to identify unsteady loadings and/or performance deficits within certified flight pumps during anomaly investigations.




PUMP CFD

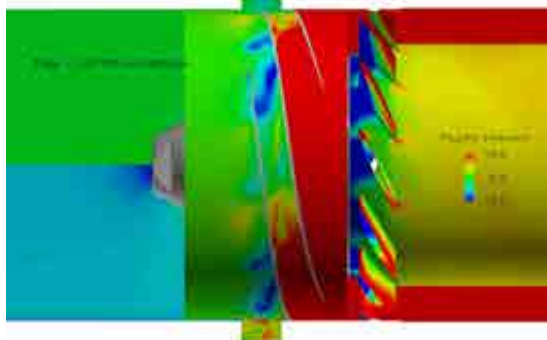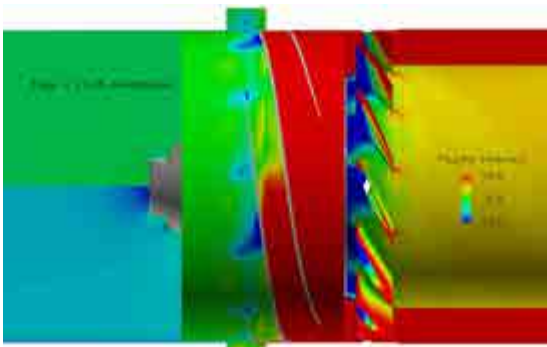


Non-cavitating CFD is used to identify critical unsteady flow interactions between inducer blades and cavitation suppression grooves. These interactions are thought to promote higher order cavitation oscillations within the cavitating turbopump. The time-accurate CFD predicts slowly rotating/high cell count progressions very similar to higher order cavitation instabilities measured in waterflow test.


Time accurate CFD provides insight into the complex flow field behind higher order cavitation. Higher order cavitation is a potential forcing function for primary inducer bending modes.



CFD calculations effectively capture tip vortex dynamics for inducers operating with minimal tip clearance (without cavitation suppressor).




COMBUSTION DEVICES




Scope of branch responsibility in support of liquid rocket engine thrust chamber assembly design & development


- Large and small engines
- Analysis and testing
- Performance
- Pressure, acoustic and thermal environments
- Combustion stability

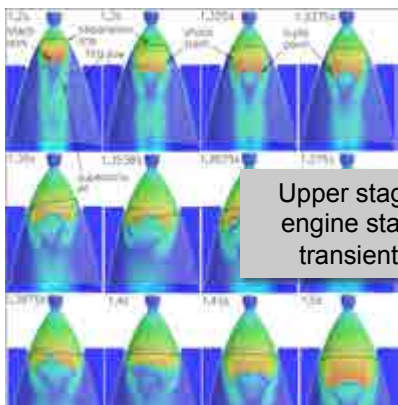


Upper stage engine start transient

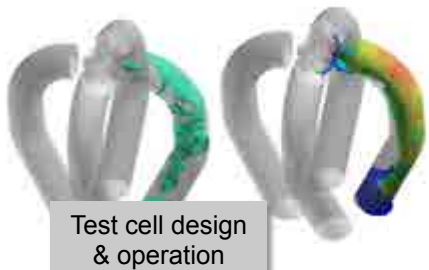


Test cell design & operation

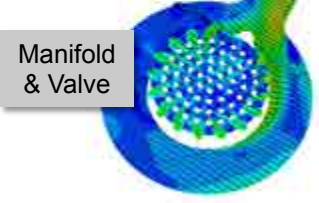


Manifold & Valve

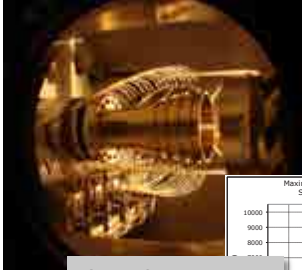


Cold flow testing in Nozzle Test Facility

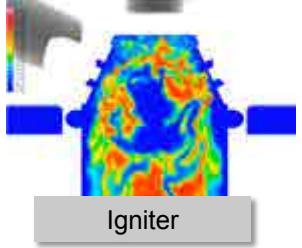

Igniter




Stability rating bomb test simulation

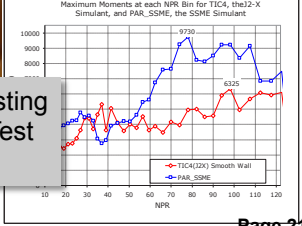


Maximum Moments at each NPR Bin for TCC4, theJ2-X Simulant, and PAR_SOME, the SSME Simulant

Page 21



COMBUSTION STABILITY ASSESSMENT APPROACH & SKILLS LEVERAGED BY ER42



- **Branch asked to assess the combustion dynamics / stability of an engine design**
 - Chug
 - Acoustic
 - Other oscillation modes (e.g., buzz from upstream supply system)
- **Common to all three generic stability types are two main assessment questions:**
 - What is the margin associated with the stability type?
 - Requires accepted definition of stable, unstable, and marginal
 - What margin is acceptable for a given engine design?
- **Assessment comes from a combination of two approaches:**
 - **Analytical**
 - Linear: system stability approaches; energy based approaches
 - Non-linear: limit cycle waveform evaluation
 - **Testing**
 - Non-linear: waveform characterization of damp times and amplitudes

- **Skills Required**
 - Unsteady Fluid Transients and Dynamics
 - Heat Transfer and Thermodynamics
 - Acoustics
 - System Dynamics and Linear Analysis (Stability Theory, State Space, Transfer Matrix)
 - Electronics (Fluid Circuit Analogies, Linear Analysis)
 - Mathematics (DDEs, Model Development, Linear Analysis)
 - Control Engineering (System Identification, Nyquist Plots, Bode Plots)
 - Stability Theory (Nyquist Criterion, et al.)
 - Signal Analysis (Data Characterization and Reduction)
 - Instrumentation and Data Acquisition
 - Combustion Devices and Propulsion
 - Combustion Processes (Spray and Flame Dynamics, Mixing, Atomization, Vaporization, etc.)

Page 22




COMBUSTION STABILITY ASSESSMENT: EMPIRICAL STABILITY ASSESSMENTS




Example engine test data - 1L mode instability exhibited during testing program

- ~300 – 400 Hz stable to unstable signal
- **New methods created to judge spontaneous stability**
 - Offered new way to approach characterizing signal via statistics and frequency variability
 - Gave metrics on how to divide stable vs. unstable
- **New methods created to judge dynamic stability**
 - Assess statistical character of data prior to bomb
 - Track when amplitudes reach back within 'statistically significant limits'


Data FFT

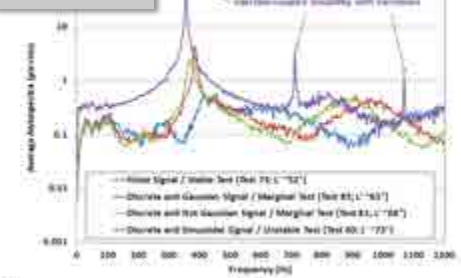

Damp Time Assessment

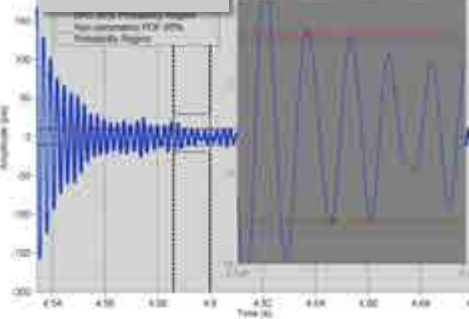


Unstable Test

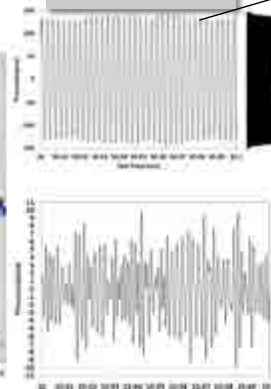

Stable Test



Stability Map

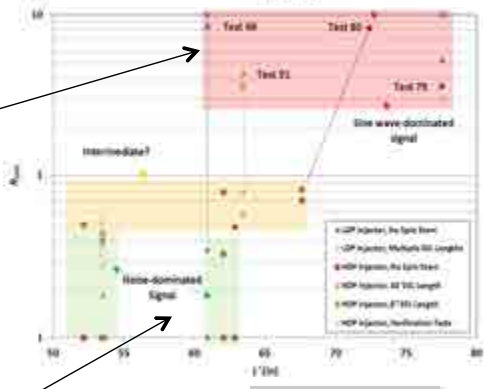


COMBUSTION STABILITY ASSESSMENT: ANALYTICAL ASSESSMENTS




Branch analytical models encompass:

- Classical linearized stability models
- Computational Fluid Dynamics (CFD)
- Finite element modeling (FEM)
- **Linearized models are used for chug and acoustic mode evaluations**
 - State-space and impedance models
- **CFD and FEM used to better characterize complex flowfields and geometries**
 - Accounts for distribution of fluid properties
 - Coupled acoustic modes better evaluated using CAD geometries and CFD inputs


CFD of Chamber Fluid Properties

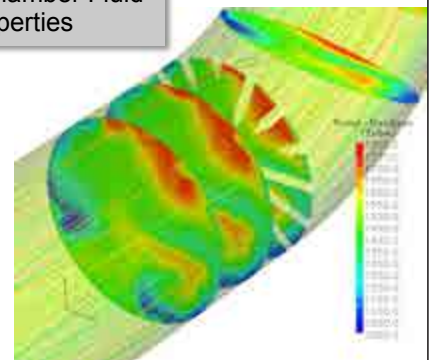

Acoustic FEM of 1L Chamber Mode

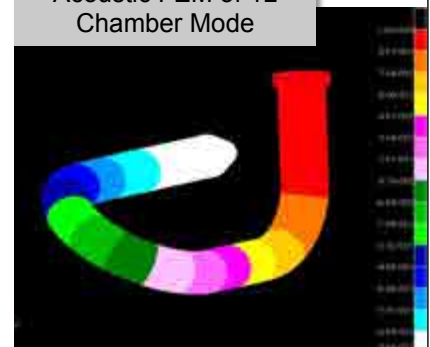

Nyquist Stability Plot

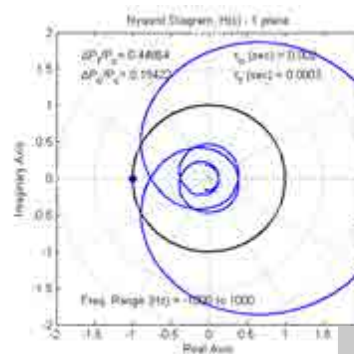


$$x(\omega) = \frac{\bar{X} \sin(\omega(\bar{\tau}_{r,o} - \bar{\tau}_{r,f}))}{\sin(\omega\bar{\tau}_{r,f}) + \theta_s \omega \cos(\omega\bar{\tau}_{r,f})}$$

$$y(\omega) = \omega$$

$$z(\omega) = \frac{\bar{F} \sin(\omega(\bar{\tau}_{r,f} - \bar{\tau}_{r,o}))}{\sin(\omega\bar{\tau}_{r,o}) + \theta_s \omega \cos(\omega\bar{\tau}_{r,o})}$$

Gain / Phase Plots





COMBUSTION STABILITY ASSESSMENT: IMPROVING THE STATE-OF-THE-PRACTICE




Objective of Improvements

- Advance the predictive capability of current, state-of-the-practice tools and methodologies used in combustion stability assessments
- Facilitate
 - Confident identification & characterization of combustion instabilities
 - Successful & efficient mitigation during propulsion system development
- Minimize development costs & improve hardware robustness


Approach to Improvements

- Improve state-of-the-practice stability assessment capability by use of higher-fidelity, physics-based information either integrated into the engineering tools or used separately in the assessment process
- Extract physics-based models/information from focused state-of-the-art CFD simulations
- Validate new capability by exercising the improved capabilities on relevant experiments


Fluctuating Pressure




PSD




Mode Shape




Heat Release



Rayleigh Index*



Oscillation Dec.



*Courtesy of W. Anderson/Purdue University


Page 25



COMBUSTION STABILITY ASSESSMENT: IMPROVING THE STATE-OF-THE-ART




Instantaneous 2-D snapshots from a 3-D non-reacting simulation of a gas-centered swirl coaxial element

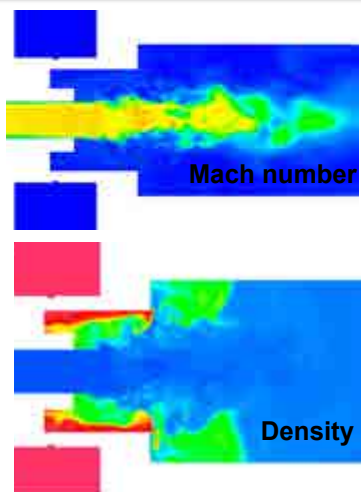

Pressure in fuel manifold





RANS simulation of a reacting like-on-like impinging doublet element

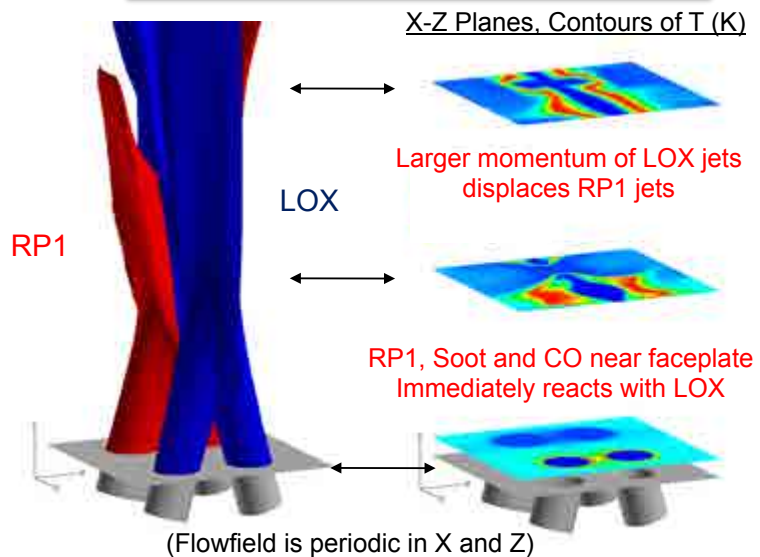


Ongoing improvements for injector CFD


- Flamelet formulation for efficient simulation of reacting flows
- VOF & atomization for 2-phase flow
- Low dissipation schemes better resolving turbulence & acoustics

Page 26

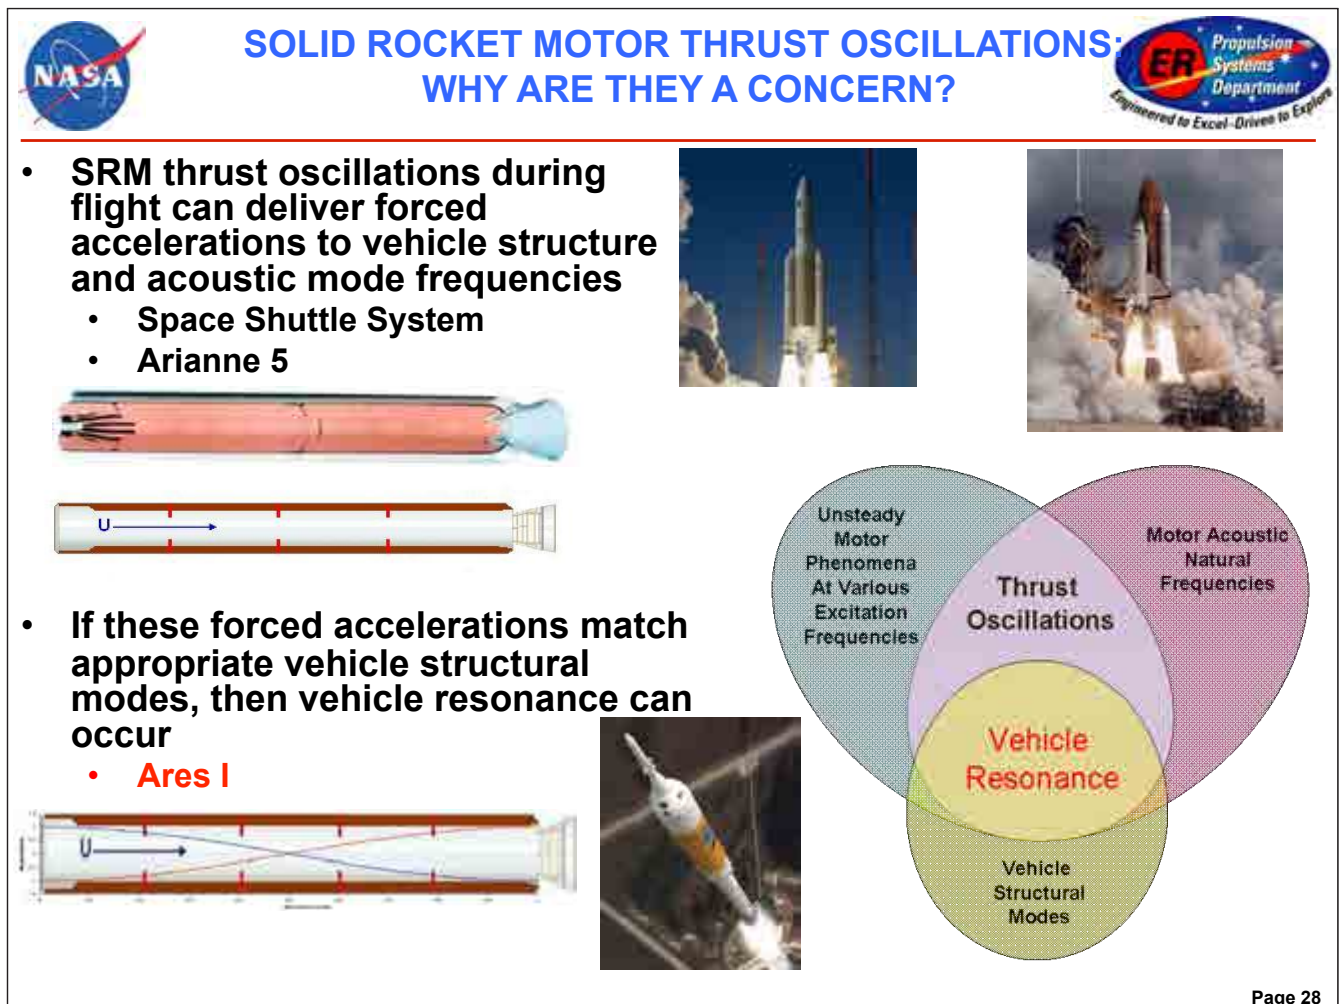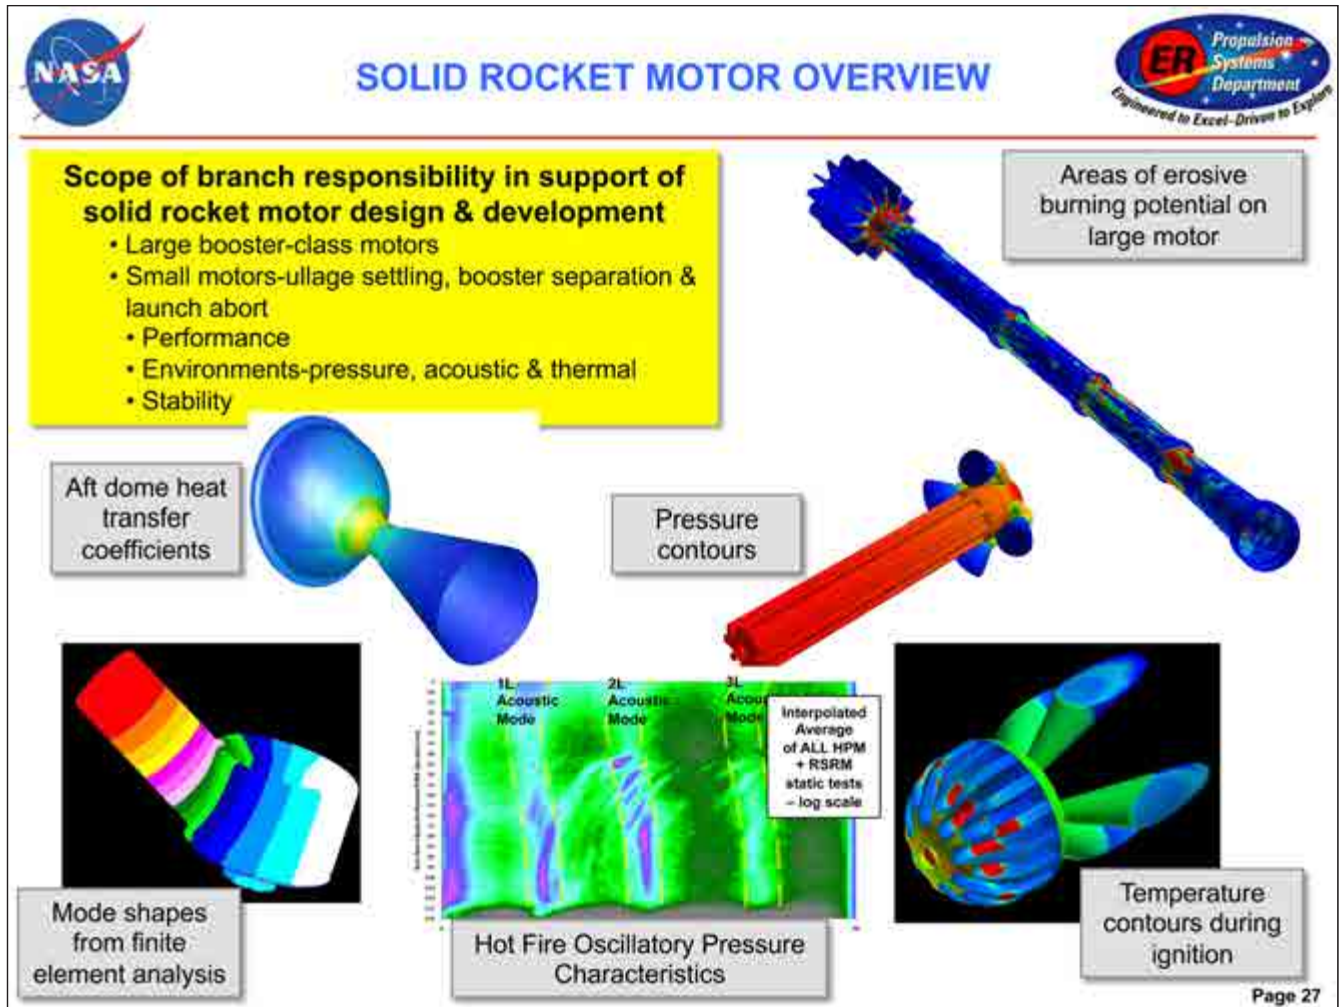

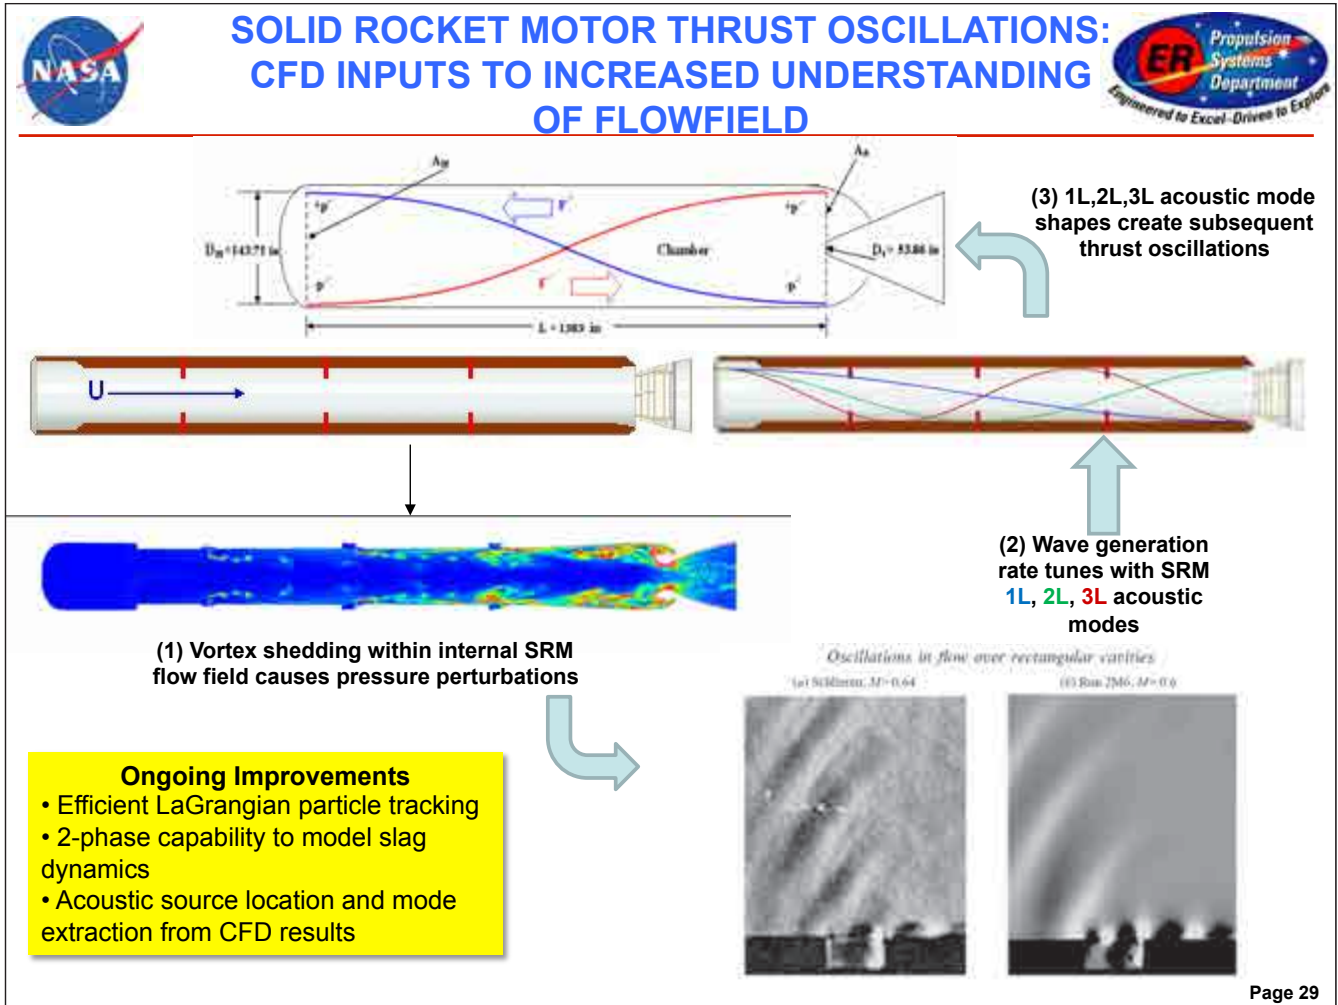

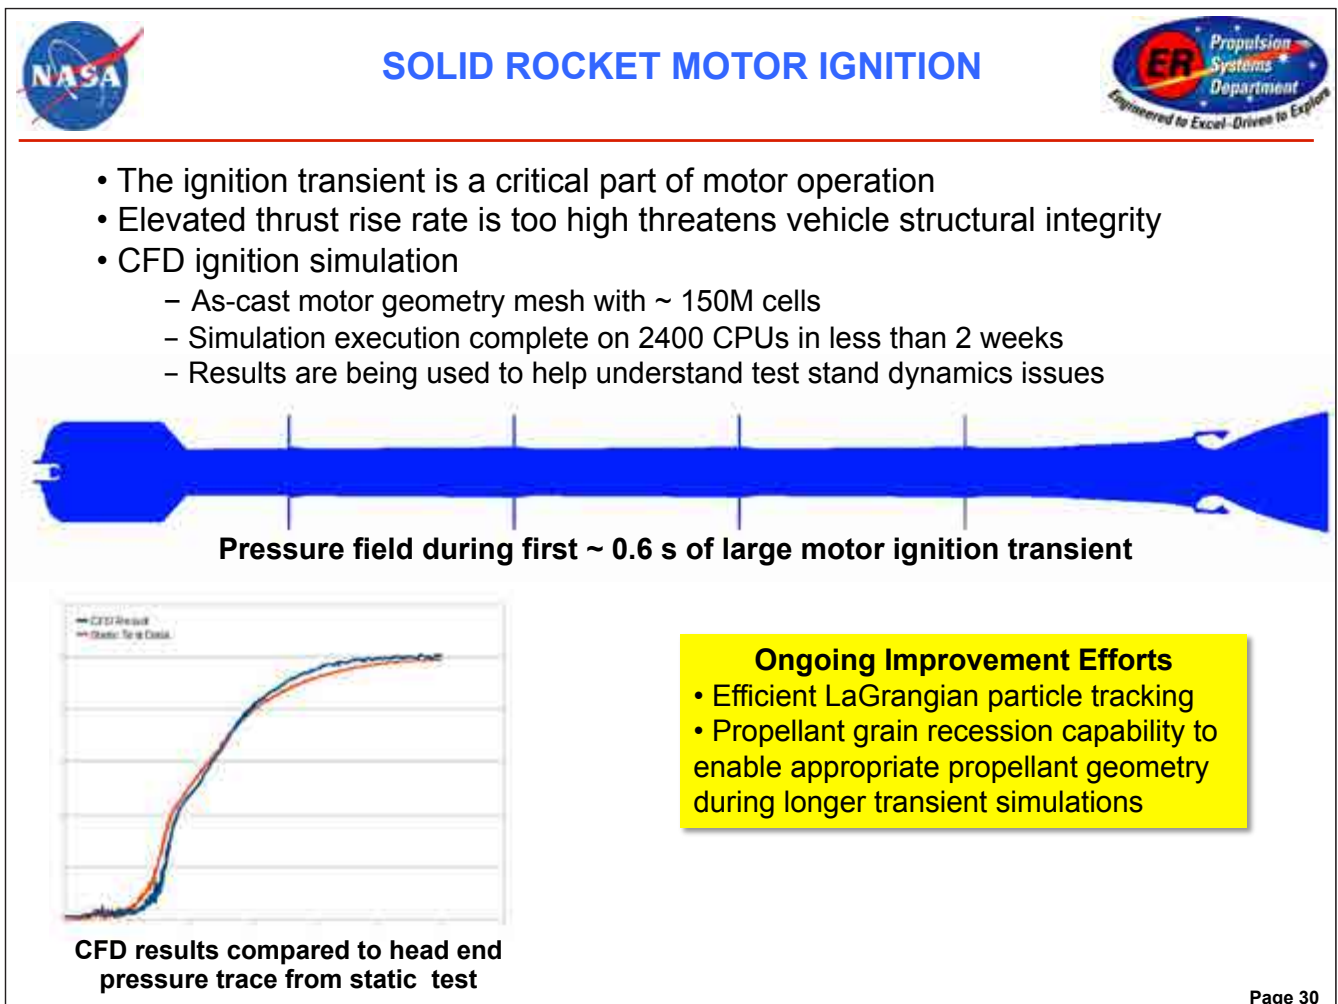

Page 29



Page 30



LAUNCH ENVIRONMENTS




1D Linearized Physics Models


ER42 Develops the Fluid and Acoustic Environments for Launch

- Liftoff Acoustics
- Overpressure
- Sound Suppression
- Liftoff Debris Transport
- Hydrogen Entrapment


ER42 Uses Multiple Levels of Analysis and Testing to Accomplish this Work




Flight Tests

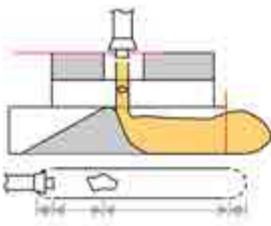


CFD




Scale Model Tests

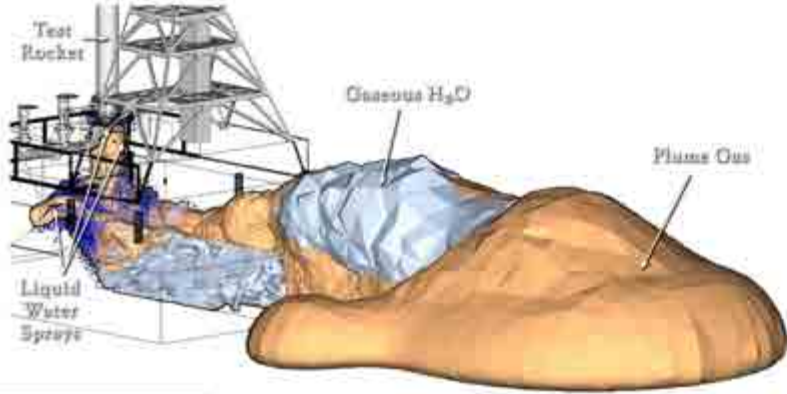

Page 31




OVERPRESSURE – ANALYTICAL MODEL




Overpressure Predictions Using Analytical Models

- *Broadwell & Tsu Model*: Linearized 1-D physics-based model for overpressure in a ducted launcher
- *4-wave model*: Acoustic modification to incorporate resonant conditions
- *Attenuation Model*: Empirically based on Shuttle data or other motor/ engine correlations
- *Knockdown Factors for water suppression or pressure wave diffraction*: Empirically-based or CFD simulation-based
- *Margin*: Technical agreement based on CFD simulations and unknown
- *Improvement* – Continually improve models based on CFD, Test data, and Flight data

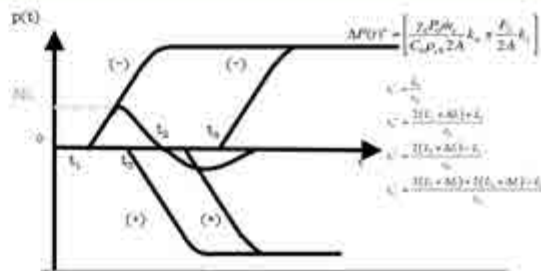

4-Wave Physics Model

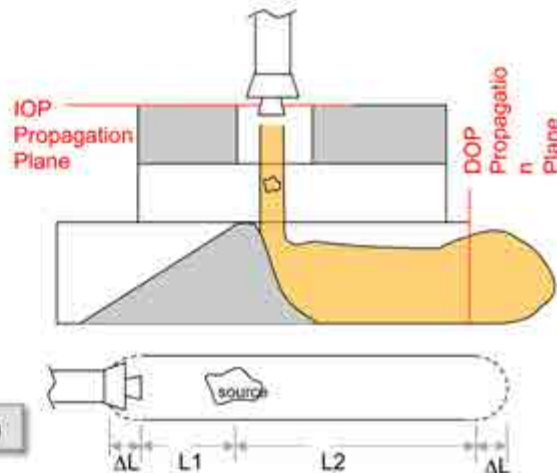

Broadwell and Tsu Model Application

Page 32



OVERPRESSURE – CFD



CFD has recently shown to represent overpressure very accurately without the inclusion of water



- Demonstrated ability to capture IOP and DOP waves at several locations for dry tests

Provides ability to address limitations of Analytical models


- Accounts for complex flow scenarios and three-dimensional launch pad geometry

Provides parametric studies where unknowns currently exist

Ongoing improvements include modeling water suppression systems, multiphase solid booster effluent, and capture higher frequency spectral content

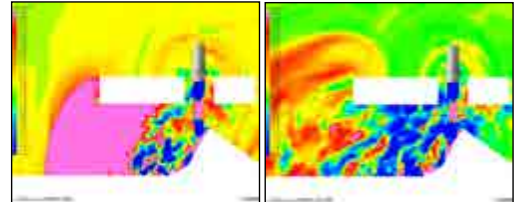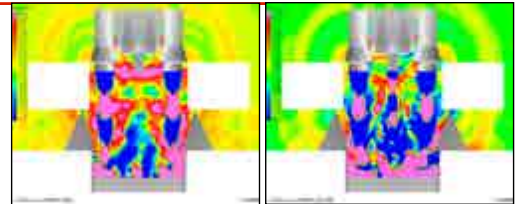


CFD simulations with (right) and without (left) liquid engine plumes

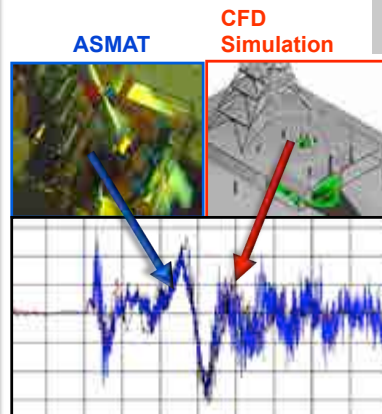

Comparisons of CFD predictions with ASMAT data



OVERPRESSURE – CFD ANIMATION

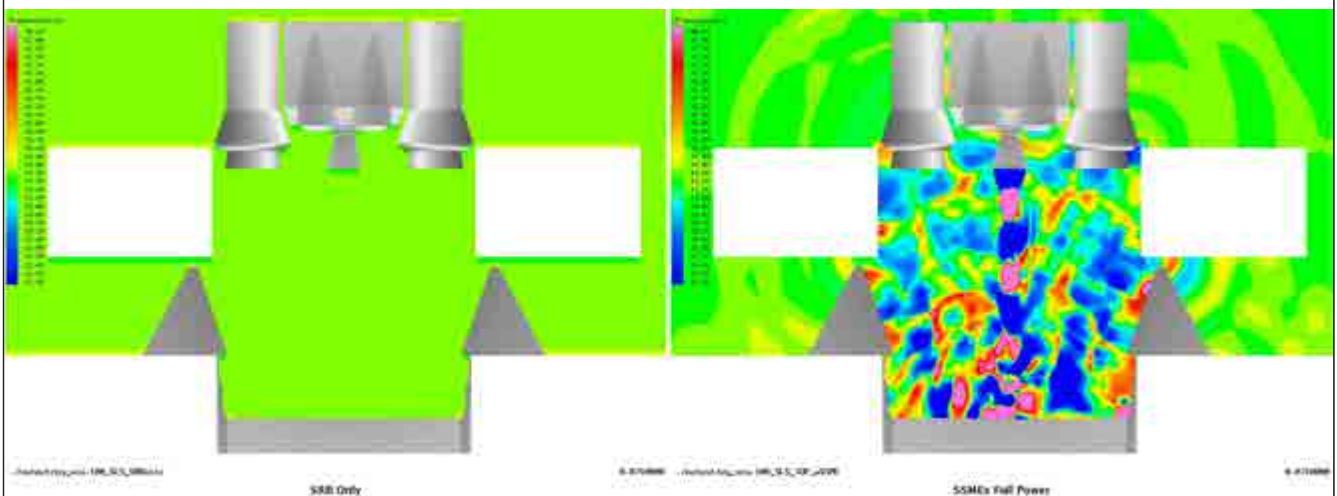



LIFTOFF ACOUSTICS



DESIGN NEW
LAUNCH VEHICLE



DERIVE LIFTOFF
ENVIRONMENTS

- > Liftoff noise is generated by the mixing of rocket exhaust flow with the surrounding atmosphere and its interactions with surrounding launch pad structures.
- > ER42 creates initial liftoff acoustic environment derived from Saturn V, Space Shuttle flight data, and Ares I-X flight test data, for the development of Ares I and the proof-of-concept vehicle, Ares I-X. Parametrics and identification of sources from CFD

VALIDATESCALE
MODEL ACOUSTIC
TEST

- > Use acoustic scale model test to validate liftoff acoustic environments and water sound suppression system design.



Page 35




SCALE MODEL ACOUSTIC TESTING



- Determine model scale using Strouhal Number

$$St = \left(\frac{f_1 d_1}{V_1} \right) = \left(\frac{f_2 d_2}{V_2} \right)$$

- Design test article to this scale; fire; acquire data.
- Data Processing

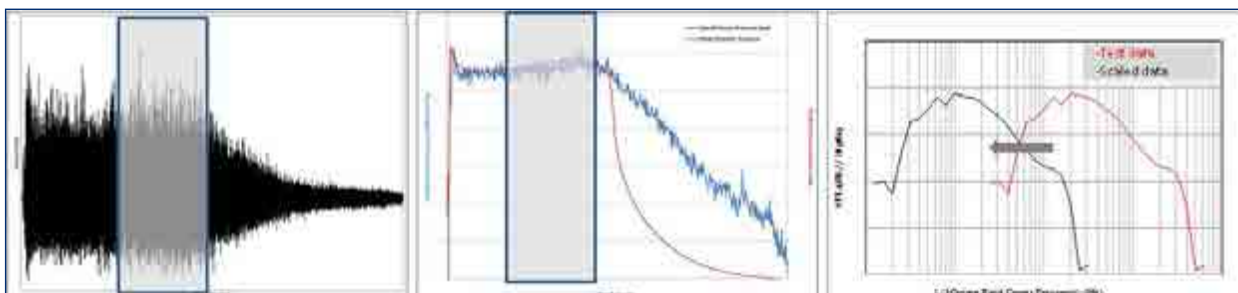

Typical pressure time history with analysis window (a) and analysis window overlaid on chamber pressure measurement and RMS OASPL time history (b) and a one third octave plot for the test data compared to the scaled data (c).






SCALE MODEL TEST MOVIE



ASMAT VALIDATION OF CFD (COMPARISONS OF FREQUENCY WITHIN DUCT)



- Simulations of 5% scale rocket to model transient startup of motor
- Validated pressure temporal/spectral accuracy of CFD vs test data.
- Simulations showed good correlation with test data.
 - Matched pressure content above deck to 1000-1500 Hz
 - Matched pressure content below deck to 2000-3000 Hz
- Provided rationale and confidence to use CFD to predict environments for full-scale vehicles (up to ~150 Hz)

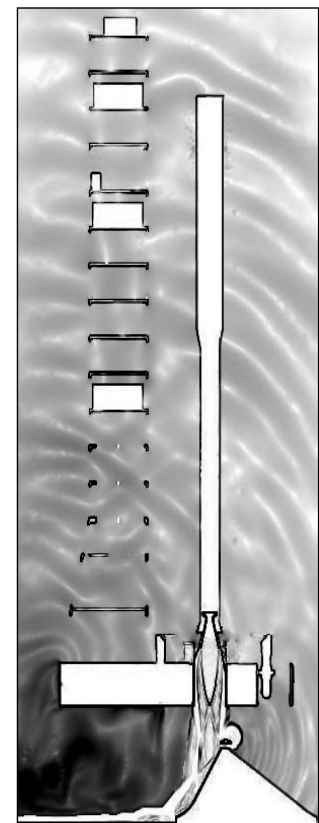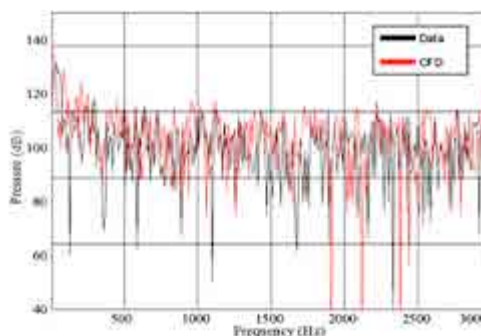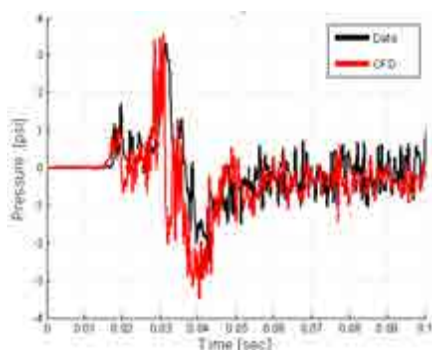




APPROACH TO ACOUSTICS PROPAGATION CHALLENGE



Solution: Implement hybrid approach of CFD + Computational Aero Acoustics (CAA) for liftoff acoustic fields

- Use high-fidelity CFD modeling to capture important plume physics (multi-phase plume, plume mixing and impingement, gas-water phase effects from deluge, etc.)
- Capture acoustic sources originating from plumes, impingement, capture water suppression effects
- Propagate using CAA from acoustic source surfaces enclosing noise source regions

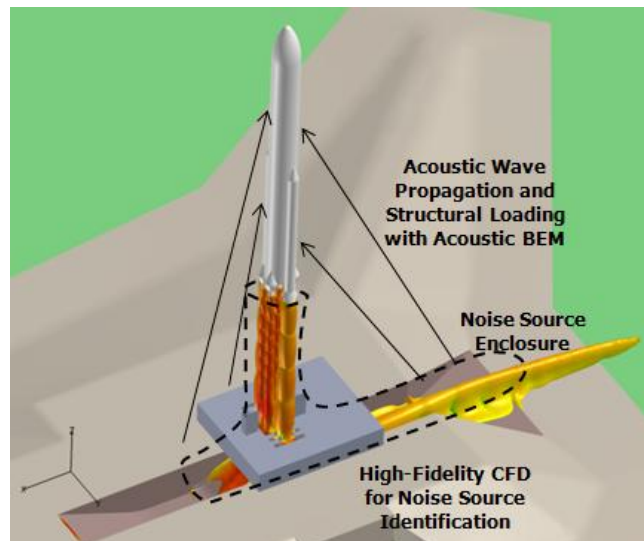

Which CAA method is best suited for this application?


- CAA acoustic field propagation method must be able to resolve reflections, refraction and attenuation from interaction with structures such as launch platform and tower
- Two approaches under evaluation:
 - Boundary Element Method (BEM)
 - Farfield high-order Euler solution




CHALLENGE: IDENTIFICATION OF THE ACOUSTIC SOURCE REGIONS



- Major challenge arises in defining envelope of source regions for handover from CFD to CAA
- Plume boundary shape is quite complex due to interaction with launch pad
- Example: Visualization of Noise Source regions for ASMAT Plume Impingement

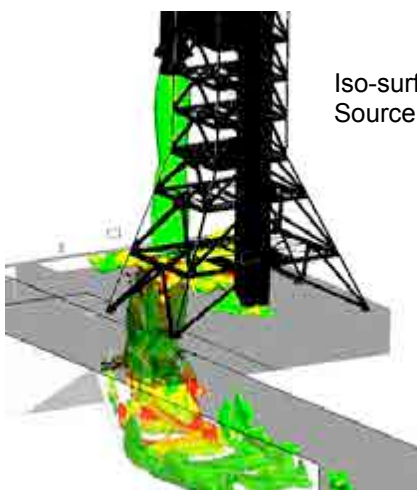

Iso-surface of Acoustic Source regions

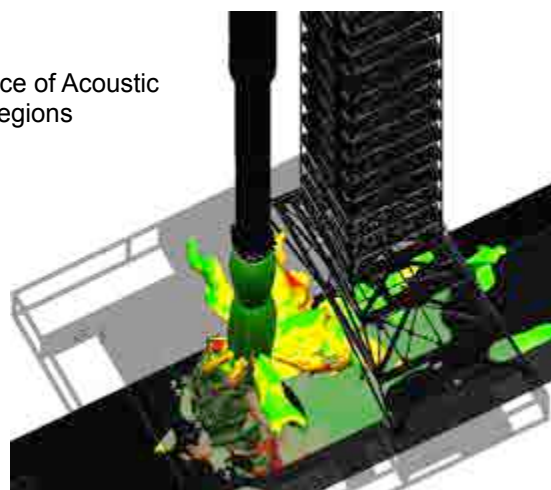





CHALLENGE: SIMULATION OF WATER MITIGATION IN CFD





- Using Lagrangian Particle model to simulate water injection into launch pad plume environment for SLS concepts, Space Shuttle, and scale tests.
- Injecting water at up to 200,000 gal/min
- Simulating up to 30M active particles
- Liquid drop emission from booster holes, trench deflectors, or from rainbird systems
- Modeling water break-up and phase change
- Considerable changes shown in turbulent kinetic energy on deck, plume temperature, and ignition overpressure propagation.

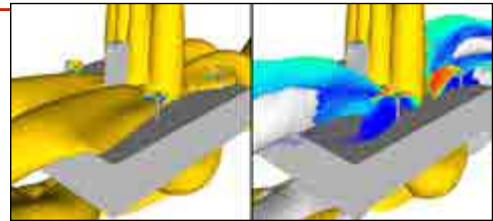

Reduction of Plume Temperature by Water Deluge

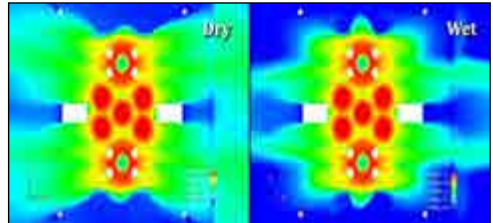

Reduction of Kinetic Energy at Deck Level

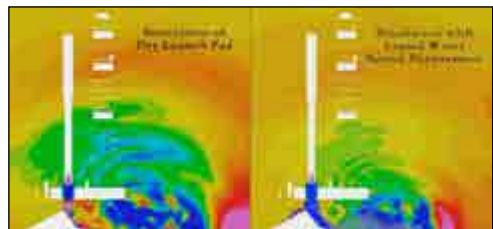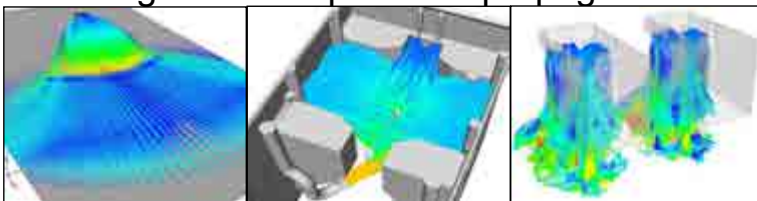

Reduction of Ignition Overpressure

Page 41



SUMMARY



- The Fluid Dynamics Branch at MSFC has the mission is to support NASA and other customers with discipline expertise to enable successful accomplishment of program/project goals
- The branch is responsible for all aspects of the discipline of fluid dynamics, analysis and testing, applied to propulsion or propulsion-induced loads and environments, which includes the propellant delivery system, combustion devices, coupled systems, and launch and separation events
- ER42 supports projects from design through development, and into anomaly and failure investigations
- ER42 is committed to continually improving the state-of-its-practice to provide accurate, effective, and timely fluid dynamics assessments and in extending the state-of-the-art of the discipline

Page 42